

B9000



SIOEN sio-line®

ISTANBUL
TEL: 0212 25 68 01 75
FAX: 0212 25 68 01 47


ITALY
TEL: 051 26415 01
FAX: 051 26415 10

TRUCK COVERS • B9000

SIOEN COATING DISTRIBUTION



B9000/9002

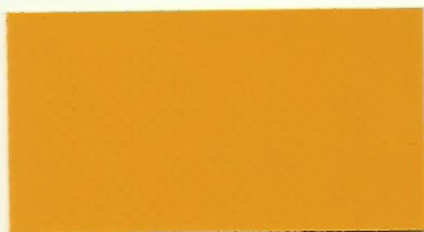

1002 - 250cm (RAL-)



1003 - 250cm (RAL1014)



1018 - 250cm (RAL1018)



1021 - 218, 250cm (RAL1021)



1024 - 218, 250, 275cm (RAL1003)



1059 - 250cm (RAL1032)



B9000 • TRUCK COVERS

SICEN



1622 - 250cm (RAL-)



3002 - 218, 250cm (RAL-)



3015 - 218, 250cm (RAL3002)



3021 - 218, 250cm (RAL2008)



3105 - 250cm (RAL-)



5003 - 250cm (RAL5012)



5004 - 250cm (RAL5013)



5020 - 218, 250cm (RAL-)



5031 - 218, 250cm (RAL5010)



5063 - 218, 250, 275cm (RAL5002)



5177 - 250cm (PMS273c)



6001 - 218, 250, 275cm (RAL-)



SİCEN



6002 - 250cm (RAL6001)




6027 - 250cm (RAL6018)



6028 - 250cm (RAL6005)



7001 - 218, 250cm (RAL-)

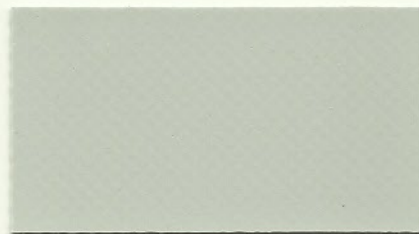

7002 - 250cm (RAL7035)




7003 - 218, 250cm (RAL-)



7024 - 250cm (RAL-)



7500 - 218, 250, 275, 300cm (RAL9006)

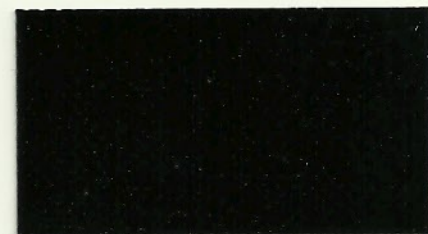

7999 - 218, 250cm (RAL9005)



8020 - 250cm (RAL8017)



9002 - 150, 218, 238, 250, 275, 300cm (RAL-)



9013 - 250, 275, 300cm (RAL9010)

TRANS

SICEN



B9000

weefsel/tissu/fabric Gewebe/tejido		100% PES 1100 dtex	
coating/enduction Beschichtung/revestimiento		PVC	
gewicht/poids/weight Gewicht/peso total		680 g/m ²	DIN EN ISO 2286-2
vernislacquer/lackierung/lacado		1/1	
kalender/calandre/Embossing/kalender		Glossy	
treksterkte résistance rupture breaking strength Höchstzugkraft resistencia a la ruptura	ketting/warp/chaîne Kette/urdimbre	3000 N/5cm	EN ISO 1421 meth 1
	inslag/weft/trame Schuß/trama	2800 N/5cm	
scheurweerstand résistance à la déchirure tear strength Weiterreißfestigkeit resistencia a la rasgadura	ketting/warp/chaîne Kette/urdimbre	300 N	DIN 53 363
	inslag/weft/trame Schuß/trama	300 N	
hechting/adhérence/adhesion Haftung/adherencia		90 N/5cm	EN ISO 2411
temperatuurbestendigheid tenue à la température temperature resistance Temperaturbeständigkeit resistencia a la temperatura		-30 °C/+70°C	DIN EN 1876-2
lichtechtheid tenue à la lumière light fastness Lichteinheit resistencia a la luz	(uitgezonderd wit en (semi-) transparent) (excepté en blanc et (semi-) transparent) (except white and (half-) transparent) (außer Weiß und (Semi-)transparent) (excepto blanco/(Semi-)transparente)	7-8	ISO 105 B02
onbrandbaarheid/inflammabilité flammability/Flammbarkeit/inflamabilidad		<100 mm/min	ISO 3795
toepassing application application Anwendung aplicación	truck-covers bâches camions truck covers LKW-Planen lona para camión		

• Al onze technische gegevens zijn indicatief • Toutes nos caractéristiques techniques sont indicatives • All our technical characteristics are indicative •
• Alle technischen Daten sind indikativ • Las características técnicas están indicativas •

SIOEN